


REDUCED PRESSURE BACKFLOW ASSEMBLY (RPBA AND RBDA)

Spanaway Water Company
STANDARD DETAIL

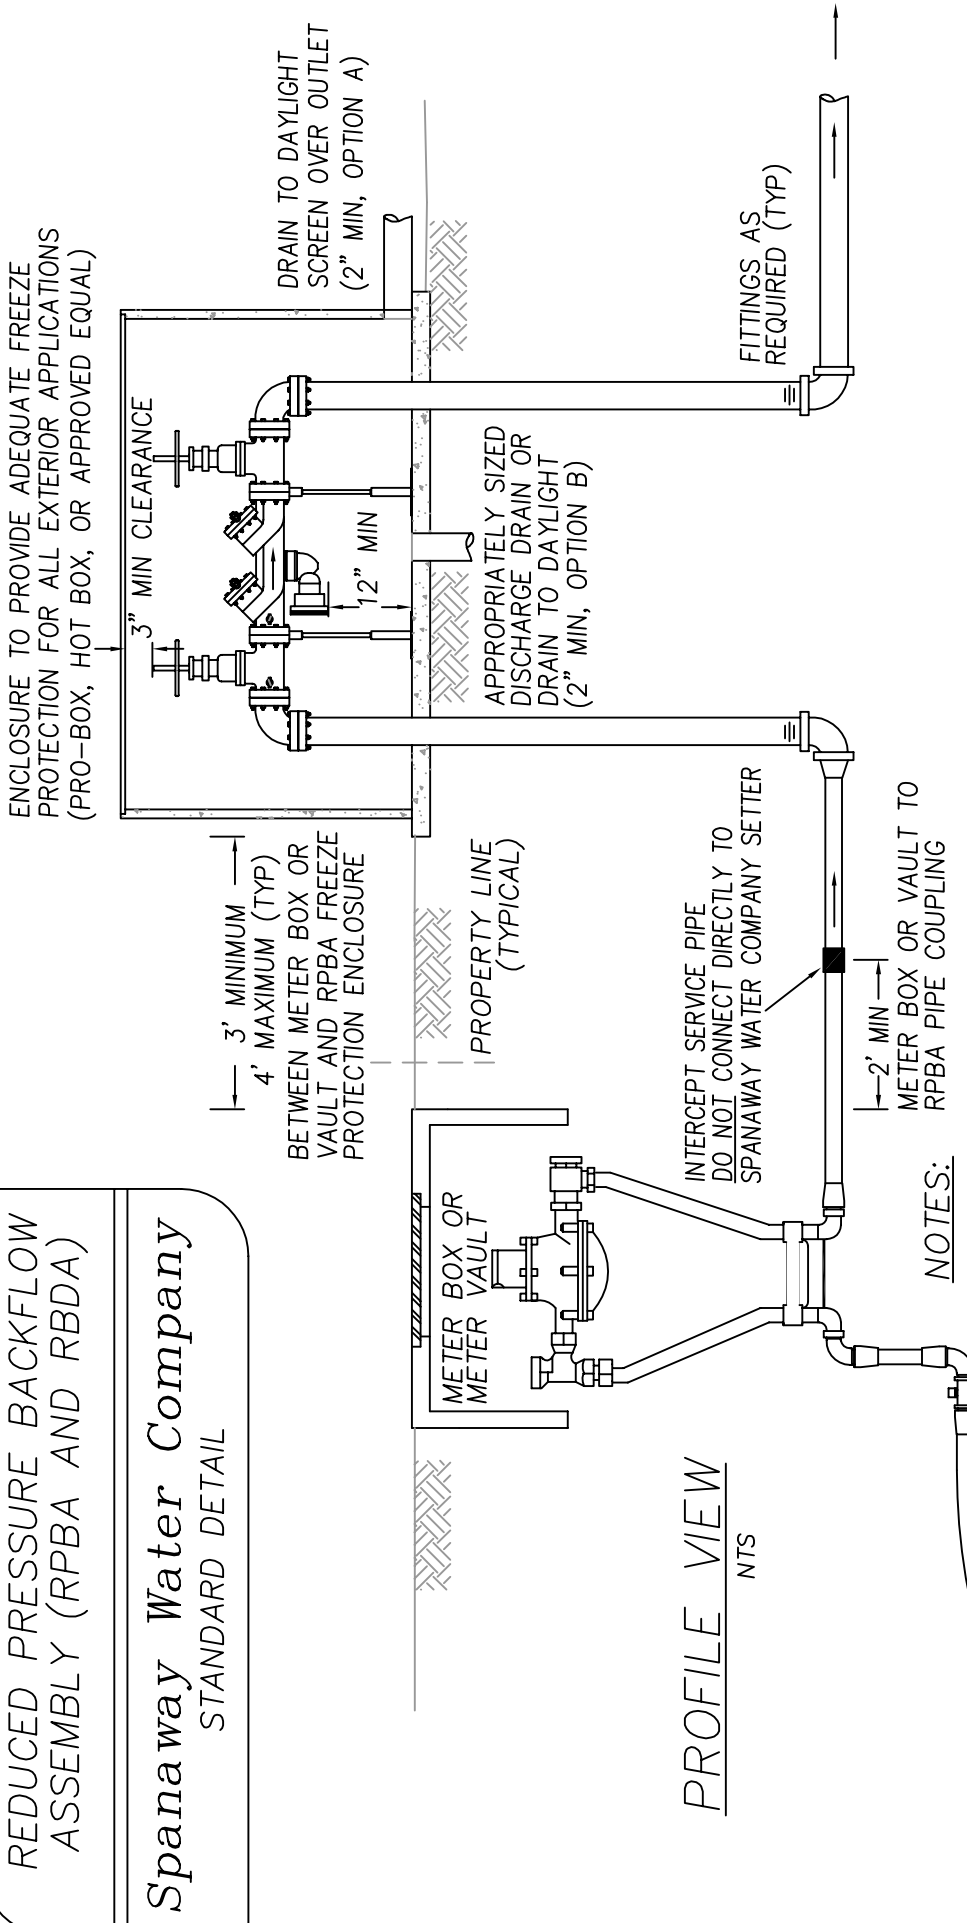

PROFILE VIEW
NTS

NOTES:

1. ALL LOCATIONS SHALL BE PRE-APPROVED BY SWC PRIOR TO INSTALLATION
2. RPBA OR RPDA TO BE APPROVED AND TESTED AS REQUIRED BY WSDOH
3. ALL ENCLOSURES AND AIR GAP DRAINS SHALL BE PRE-APPROVED PRIOR TO INSTALLATION. THE ASSEMBLY SHALL BE PROTECTED FROM FREEZING/FLOODING
4. ENCLOSURE PADS SHALL HAVE A MINIMUM OF 3' CLEARANCE FROM ALL STRUCTURES INCLUDING WATER METER BOX
5. THE BACKFLOW ASSEMBLY SHALL BE TESTED AFTER INSTALLATION AND PRIOR TO ACCEPTANCE. SPANAWAY WATER COMPANY PERSONNEL SHALL INSPECT THE INSTALLATION FOR APPROVAL. TESTING WILL BE REQUIRED ON AN ANNUAL BASIS PER STATE DOH AND SPANAWAY WATER COMPANY REQUIREMENTS.

REFER TO SPANAWAY WATER COMPANY STANDARDS REGARDING STATE APPROVED CROSS CONNECTION CONTROL DEVICES, WATER COMPANY INITIAL ACCEPTANCE, AND ANNUAL TESTING REQUIREMENTS